

LIST PRICE 2010 GENIO P full CP Genio-A

ELCA
RADIOCOMANDI

Elca s.r.l.
Via del Commercio, 7/B
36065 Mussolente (VI)



TRASMITTER

RECEIVER

BATTERY CHARGER











BATTERY




TECHNICAL DATA:

Transmitter protection level: IP65
Receiver protection level: IP44
Transmitter dimensions: 84x240x50 mm
Receiver dimensions: 170x500x90 mm
Transmitter weight: 0,5 Kg
Working temperature : -20/+55°C
Voltage applicable to the contacts: max 110 V
Operating distance: 150m
ISM band working frequency: 433,100-434,790 MHz
Autonomy at 20°C: approx. 20 hours

Legenda: (Symbol description:)

-  Single step push button.
-  Double step push button.
-  Double step push button with three sequential commands.
-  Lateral single step push button.
-  Single step push button.
-  ON-OFF key switch.
-  START key switch.
-  ON-OFF key switch with frequency setup.
-  Three position rotary switch.
-  STOP push button.

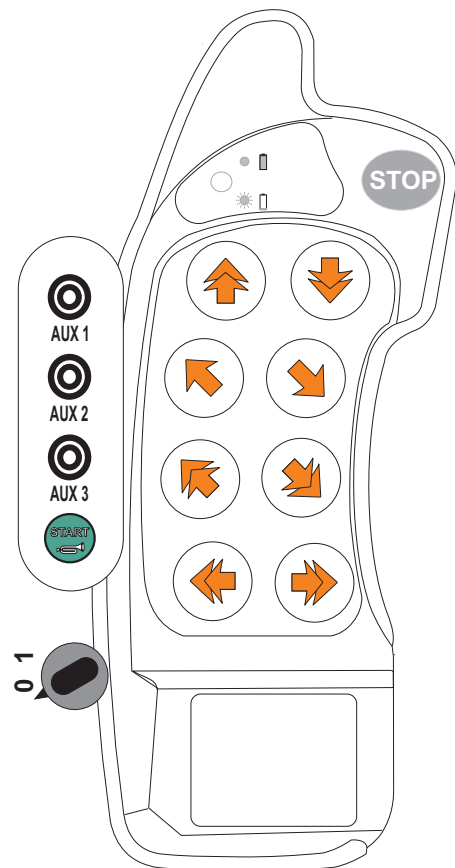

ARTICLE: GEPAFUCPXXE07

LIST PRICE € 1240,00

ON/OFF INDUSTRIAL SAFETY RADIO REMOTE CONTROL SYSTEM CONSISTING OF:

- n. 01 ergonomic hand-held transmitter with: internal antenna and commands as per above layout;
- n. 01 receiver type "Genio-A" with: internal antenna, **24-48-55-110-220 Vac power supply** and cableglad output (not wired);
- n. 01 control battery charger type: "CONTROL-07-MH 80-250 Vac";
- n. 02 rechargeable batteries type: "PINC-07MH NiMh 7,2V 700mAh";
- Multilingual instruction manual, EU certificate

ACCESSORIES INCLUDED IN THE PACKAGE:

- Wrist-belt