


LIST PRICE 2010 GENIO PUNTO 33.03

ELCA
RADIOCOMANDI
www.elcaradio.com

TECHNICAL DATA:

Transmitter protection level: IP65
Receiver protection level: IP44
Transmitter dimensions: 172x130x125 mm
Receiver dimensions: 135x255x85 mm
Transmitter weight: 1,1 Kg
Working temperature : -20/+55°C
Voltage applicable to the contacts: max 220 V
Operating distance: 150m
ISM band working frequency: 433,100-434,790 MHz
Autonomy at 20°C: approx. 20 hours

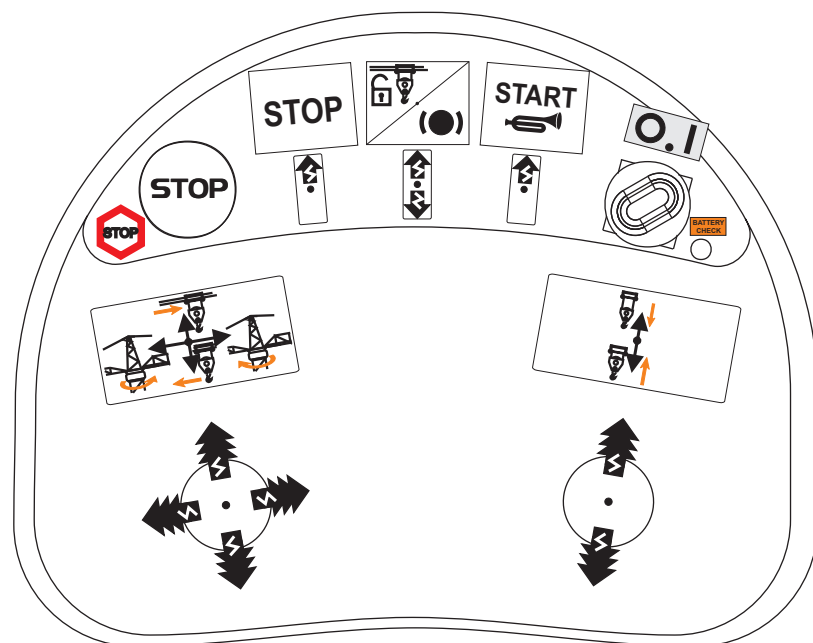

TRASMITTENTE CINGHIA MARSUPIO



RICEVENTE



CARICABATTERIA BATTERIE

NOTA: serigrafia personalizzabile su richiesta

rif. GEPUGR33.03-02

Legenda: (Symbol description:)



Selettore a levetta con ritorno al centro (instabile).
Spring return toggle switch.



Selettore a levetta senza ritorno al centro (stabile).
Stay put toggle switch.



Manipolatore con ritorno al centro (instabile).
Spring return joystick.



Manipolatore senza ritorno al centro (stabile).
Stay put joystick.



Coulisse per manipolatore.
Coulisse for joystick.

Una singola freccia corrisponde ad un singolo comando.
A single arrow indicates a single command.



Pulsante.
Push button.



Selettore rotativo.
Rotary switch.



Pulsante a fungo di STOP.
STOP push button.



Chiave di accensione 0-1.
ON-OFF key switch.



Chiave di accensione 0-1 con START.
START key switch.

CODICE ARTICOLO: GEPUGSGRXXE12

LISTINO € 1460,00 iva escl.

ON/OFF INDUSTRIAL SAFETY RADIO REMOTE CONTROL SYSTEM CONSISTING OF:

- n. 01 Waist portable transmitting unit with: internal antenna and commands as per above layout;
- n. 01 receiver type "Genio-A" with: internal antenna, **24/48/55 Vac power supply** and cableglad output (not wired);
- n. 01 control battery charger type: "CONTROL-GE 80-250 Vac";
- n. 02 rechargeable batteries type: "PINC-GE NiCd 7,2V 700mAh";
- Multilingual instruction manual, EU certificate

ACCESSORIES INCLUDED IN THE PACKAGE:

- Waist-belt